Recreational Travel Products

ProSport Power Inverter

- Converts 12-volt battery power to 110V AC up to 150 watts.
- Extruded aluminum case.
- High surge capacity.
- Power/status LED indicators.
- Standard 110V AC receptacle.
- Output short and input polarity protection.
- Low battery shutdown.
- Over-temperature and overload protection.

P/N 79018

Patented Universal Cup-Holder Design

ProBeam LED Pocket Light



P/N 10111

- All-metal construction.
- High-intensity LED area lighting.
- Water-resistant design.
- 100,000-hour white LED.

High-Intensity LED Area Lighting

Battery Isolators

ProMariner Battery Isolators, with gold-plated terminals and improved efficiency, provide enhanced charging.

- Rated for use with DC devices ranging from 10 amps to 130 amps.

Part No.	Configuration	Max. Current
1-70-2*	1 alt., 2 batt.	70 amp
1-70-3*	1 alt., 3 batt.	70 amp
2-70-2	2 alt., 2 batt.	70 amp
2-70-3	2 alt., 3 batt.	70 amp
1-130-2*	1 alt., 2 batt.	130 amp
1-130-3*	1 alt., 3 batt.	130 amp
2-130-2	2 alt., 2 batt.	130 amp
2-130-3	2 alt., 3 batt.	130 amp

*Gold-plated terminals

Fuse Holders and Fuses

Part No.	Description
88104	Gold-plated, 4-position ATC or blade-type holder
88105	Gold-plated, 4-position AGU fuse holder
88553	Gold-plated, 8-position buss bar
88102	1-position ATC fuse holder
88103	1-position AGU fuse holder
88120	ANL-style fuse holder up to 425 amps

Marine Binoculars Professional and Recreational Grade

P/N 12751*

HighSeas 7 x 50RC

7 x 50RC professional with illuminated internal compass and rangefinder

P/N 11574*

WaterSport 7 x 50RC

Recreational with illuminated internal compass and rangefinder

P/N 11752

Weekender 7 x 50

Water-resistant only with green-coated lenses

P/N 11753*

WaterSport 7 x 50

P/N 11830*

WaterSport 8 x 30

P/N 01825
P/N 01025
P/N 01225

WaterSport 8 x 25

Also available as 10 x 25 and 12 x 25
Blue-coated lenses

P/N 01618

WaterSport 6 x 18

Blue-coated lenses

P/N 01412

4 x 12 Mini Monocular

Clear lenses

*Nitrogen-filled, waterproof, fog-proof, BAK 4 prisms, center-focus, ruby-coated lenses.
Product models and specifications subject to change without notice.

Professional Mariner / P.O. Box 968, Rye, New Hampshire 03870 / Tel: 603.433.4440 Fax: 603.433.4442 / www.promariner.com

ProMariner® Short Form Catalog

ProTournament Series

Professional Grade Tournament On-Board Marine Battery Chargers

- Distributed-On-Demand™ 3-step charging.
- Charges batteries 2 to 3 times faster than leading chargers.
- Half the height and weight of leading chargers.
- Limited lifetime warranty.

Model	Part No.	Volts	Amperage	Banks
ProTournament 100**	51010	12/24	10	2
ProTournament 150	51015	12/24/36	15	3
ProTournament 150L	51016	12/24/36	15	3
ProTournament 200**	51020	12/24	20	2
ProTournament 300	51030	12/24/36	30	3
ProTournament 300L	51031	12/24/36	30	3
ProTournament 300Quad	51034	12/24/36/48	30	4

**ProTournament 100 and 200 do not include on-board Push-To-Test battery bank indicators.

Certified To: U.L. 1236 Marine FCC Class B

Distributed-On-Demand™ 3-Step Charging

ProSport Series

Recreational Sport Fishing and Boating On-Board Marine Battery Chargers

- Distributed-On-Demand™ multi-stage technology.
- Extruded aluminum housing, offering more amps per bank.
- On-board lead acid/gel selector.
- 2-year warranty.

Model	Part No.	Volts	Amperage	Banks
ProSport 1.5 Portable	10115	12	1.5	1
ProSport 1.5 On-Board	10116	12	1.5	1
ProSport 6	41206	12	6	1
ProSport 8	41208	12/24	8	2
ProSport 12	41212	12/24	12	2
ProSport 20	41221	12/24	20	2
ProSport 20 Plus	41220	12/24/36	20	3

Distributed-On-Demand™ Technology

ProSport 1.5 Battery Maintainers

ProSport 1.5 Portable

ProSport 1.5 On-Board

- Fully automatic.
- Built-in safety.
- LED status indicator.
- 1-year warranty.

ProMite

Standard Edition On-Board Marine Battery Chargers

- Fully automatic, multi-stage charging.
- 100% epoxy-filled, waterproof and shockproof.
- Safe for lead and gel batteries.
- 1-year warranty.

Model	Part No.	Volts	Amperage	Banks
ProMite 5	31305	12	5	1
ProMite 5/5	31310	12/24	10	2
ProMite 5/5/3	31313	12/24/36	13	3

Fully Automatic Charging

Optional Charger Accessories

Handheld DC System Tester

87710

Remote Battery Bank Status Monitor

51060

Battery Bank Cable Extender (15') 51070

Battery Bank Cable Extender (5') 51071

51201 ProMariner Plug Holder

51202 Universal Plug Holder

Model	Part No.
Handheld DC System Tester	87710
Remote Battery Bank Status Monitor	51060
ProMariner AC Plug Holder (white)	51200
ProMariner AC Plug Holder (black)	51201
Universal AC Plug Holder (black)	51202
Universal AC Plug Holder (white)	51203
Battery Bank Cable Extender 15'	51070
Battery Bank Cable Extender 5'	51071
Remote Temperature Sensor	51050

ProTech Marine Battery Chargers/Power Supplies

ProTech Advanced Electronic, Fully Automatic, "True" 4-Step Marine Battery Chargers

The Latest in Advanced Cuddy, Cruiser, Sail, Yacht and Commercial On-Board Marine Battery Chargers.

- **Fast charging, while conditioning and extending battery life.**
- **Compact and lightweight design.**
- **Auto-ranging global AC input: 90V AC to 270V AC at 45 to 440 Hz.**
- **User-selectable: gel, lead acid or AGM batteries.**

Standard features include on-board LED indicators, user-selectable lead acid/gel battery switch, reverse polarity, ignition and over-temperature protection.
Marine U.L. 1236 and CE certified.

ProTech	Part No.	Volts	Amperage	Banks
1210	**61210**	**12**	**10**	**2**
1215	**61215**	**12**	**15**	**3**
1220	**61220**	**12**	**20**	**3**
1230	**61230**	**12**	**30**	**3**
1240	**61240**	**12**	**40**	**3**
1250	**61250**	**12**	**50**	**3**
2412	**62412**	**24**	**12**	**3**
2425	**62425**	**24**	**25**	**3**
3218	**63218**	**32**	**18**	**3**
3616	**63616**	**36**	**16**	**3**

ProInverters

ProInverters' efficient conversion of 12V DC power to 120V AC to operate on-board AC equipment is a cost-effective alternative to engine-driven generators.

ProInverters 12V DC to 120V AC

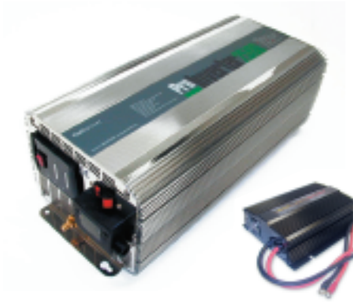

- **Modified sine wave, continuous DC-to-AC inverters.**
- **Use for TVs, microwaves, hair dryers, blenders, laptops and more.**

ProInverter	Watts	12V Input Models	24V Input Models
Pro 2500 Marine	**2,500**	**79250**	**79251**
Pro 1700 Marine	**1,700**	**79170**	**79172**
Pro 1700 Std.	**1,700**	**79173**	**79174**
Pro 1000	**1,000**	**79100**	**79101**
Pro 600	**600**	**79060**	**79061**
Pro 350	**350**	**79035**	**79036**
Pro 200	**200**	**79020**	
ProSport Cup-Holder 150	**150**	**79018**	

Pro TruSine 400

400 Watt Auto-Crossover True Sine Wave Marine Inverter

Ideal for all on-board audio-visual and hi-fi entertainment systems.

P/N 79400

True Sine Wave Output

- **True sine wave output.**
- **Fully automatic crossover.**
- **GFCI-protected.**
- **Remote-controlled output.**
- **Hardwire AC output.**
- **AC receptacle outlets.**
- **Built-in protection – short circuit, polarity, temperature and low battery.**

AC Output	AC Output Power	DC Output	Part No.
120V AC	**400 watts**	**12.6V DC**	**79405** Hardwired
3.3 amps continuous	**1,000 VA surge for 5 seconds**	**Up to 40 amps continuous**	**79400** As Shown

ProSafe Galvanic Isolation and AC Ground Wire Monitor Systems

ProSafe One On-Board System Part No. **22086**

ProSafe One System includes:

- On-board automated testing, monitoring and annunciation of ProSafe Galvanic Isolator operation and protection.
- On-board automated testing, monitoring and annunciation of shore station AC ground wire presence and operation.
- On-board automated indication of AC shore power polarity.
- All ProSafe Galvanic Isolators are U.L.-listed and ignition-protected and include a non-polarized capacitor.
- All ProSafe Isolators have low-profile/flat-pack designs with gold-plated termination studs and hardware.
- Standard remote LED and alarm display feature allowing the user at-a-glance viewing of system operation and condition.

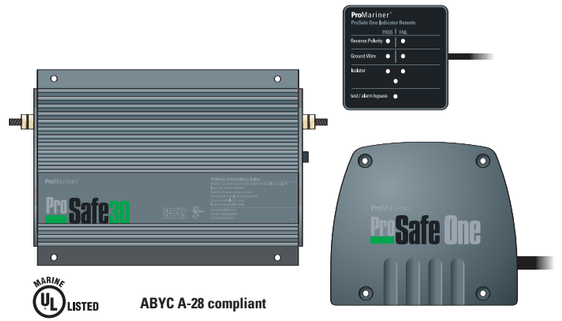

MARINE UL LISTED ABYC A-28 compliant

ProSafe One 30 Amp Single AC Line System Shown

Available in 50 Amp Single/30 Amp Dual Line System Package

ABYC A-28 compliant MARINE UL LISTED

ProSafe Deluxe 30 Amp Single AC Line System Shown

Available in 50 Amp Single/30 Amp Dual Line System Package

ProSafe Deluxe On-Board System Part No. **22070**

System includes all of the above ProSafe One features, plus:

- Automated and Push-To-Test monitoring and display of on-board bonding system zinc levels: normal, underprotected and overprotected.

  This state-of-the-art, expense-saving feature avoids the cost of viewing zincs via an underwater diver or hoisting a boat out of the water for manual zinc viewing.
- Standard universal flush or surface-mount remote monitor for easy and at-a-glance viewing.
- Standard silver, silver chloride (AgAgCl) through hull cell with mounting kit.

ProSafe Galvanic Isolators



MARINE UL LISTED

ProSafe 30 Amp Galvanic Isolator
For Single 30 Amp Shore Cord

MARINE UL LISTED

ProSafe 60/30 Amp Dual Galvanic Isolator
For Dual 30 Amp or Single 50 Amp Shore Cord

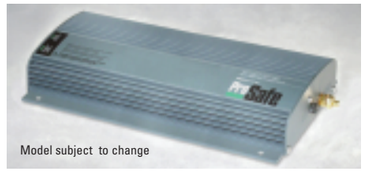

Model subject to change

ProSafe 100 Amp Galvanic Isolator
For Dual 50 Amp or Single 100 Amp Shore Cord

ProSafe Galvanic Isolation

Interrupts galvanic circuit with other boats and the dock when your boat is plugged into a shore power system. Maintains AC safety ground and solves the most common cause of corrosion. Protects against zinc loss. U.L.-tested to the new ABYC A-28 recommendation effective July 1, 2001, this new series provides unmatched performance and capability. The ABYC recommendation requires the galvanic isolator to be tested and monitored to ensure that the isolator will provide galvanic isolation and that there is a safety AC green wire (ground) aboard the boat from the shore cable. It also requires that the status is readily apparent to the user.

ProSafe Systems consist of the galvanic isolator, the monitoring electronics and a remote display.

Model	Part No.	Model	Part No.	Size (L x W x H)
ProSafe One 30 Amp Single AC Line System	**22086**	**ProSafe 30 Amp Galvanic Isolator**	**22033**	**6.25" x 6" x 1.75"**
ProSafe One 50 Amp Single/30 Amp Dual AC Line System	**22088**	**ProSafe 60/30 Amp Dual Galvanic Isolator**	**22066**	**8.5" x 6" x 1.75"**
ProSafe Deluxe 50 Amp Single/30 Amp Dual AC Line System	**22070**	**ProSafe 100 Amp Galvanic Isolator**	**22059**	**18.5" x 6" x 1.75"**